




Getriebe Stulp 16 AF GK 70

TITAN AF

Technische Informationen

Materialnummer	Materialkurztext	FFH	Maße (mm)				
			G1	A	X		
TGKS4050...	Getr.Stulp 16 AF 80/G400 1SB	801 - 1000	400	720	165	0	3
TGKS4060...	Getr.Stulp 16 AF 100/G500 1SB	1001 - 1200	500	920	290	0	4
TGKS4070...	Getr.Stulp 16 AF 120/G600 1SB	1201 - 1400	600	1120	290	0	5
TGKS4290...	Getr.Stulp 16 AF 140/G700 2SB 70	1401 - 1600	700	1320	160	0	7
TGKS4300...	Getr.Stulp 16 AF 160/G700 3SB 70	1601 - 1800	700	1520	160	0	9
TGKS4270...	Getr.Stulp 16 AF 180/G1000 2SB 70	1801 - 2000	1000	1720	770	0	9
TGKS4280...	Getr.Stulp 16 AF 200/G1000 3SB 70	2001 - 2200	1000	1920	770	0	10
TGKS4320...	Getr.Stulp 16 AF 220/G1000 3SB 70	2201 - 3000	1000	2120	770	0	12

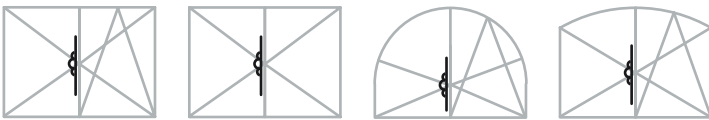

- Griffsitz konstant
- Verriegelungsabstand 700 mm
- G1 im Erstflügel
- einsetzbar im Stulpflügel mit gegenüberliegender Beschlagaufnahme

